


# ABRAMUD HW /20

SUCTION AND DELIVERY HOSE FOR DRILLING MUDS

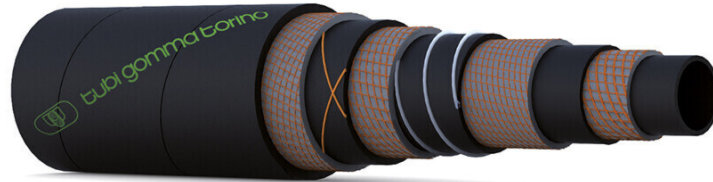

## APPLICATION

Suction and delivery hose, for drilling oil rig hose services, for petroleum muds and crude oil

## TUBE

Black, smooth, **NBR/PVC** rubber compound

## REINFORCEMENT

High strength synthetic plies, with steel wire spirals and crossing copper wires for hose grounding

## COVER

Black, smooth cloth impression, **CR** rubber compound, resistant to oil, grease, sea water, ozone and flame retardant

## WORKING TEMPERATURE

-40°F +212°F  
-40°C +100°C

| ID  |      | OD  |          | WEIGHT | WP  |     | BP  |      | BENDING RADIUS | VACUUM | COIL LENGTH |
|-----|------|-----|----------|--------|-----|-----|-----|------|----------------|--------|-------------|
| mm  | inch | mm  | inch     | kg/m   | bar | psi | bar | psi  | mm             | bar    | m           |
| 76  | 3    | 96  | 3 25/32  | 3.75   | 20  | 300 | 80  | 1200 | 350            | 0.9    | 60          |
| 102 | 4    | 123 | 4 27/32  | 5.20   | 20  | 300 | 80  | 1200 | 480            | 0.9    | 60          |
| 127 | 5    | 150 | 5 29/32  | 6.70   | 20  | 300 | 80  | 1200 | 850            | 0.9    | 60          |
| 152 | 6    | 180 | 7 15/16  | 7.62   | 20  | 300 | 80  | 1200 | 1000           | 0.9    | 60          |
| 203 | 8    | 237 | 9 21/64  | 20.37  | 20  | 300 | 60  | 900  | 1420           | 0.5    | 40          |
| 254 | 10   | 290 | 11 27/64 | 25.50  | 20  | 300 | 60  | 900  | 1780           | 0.5    | 20          |

Other diameters, pressure ratings are available on request. Technical data, structures and polymers are subject to change without notice.

## BRANDING

