


# AQUASPIR SD /5

WATER SUCTION AND DELIVERY HOSE

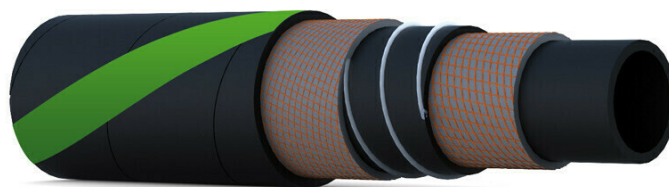

## APPLICATION

Suction and delivery hose for water and inert fluids for sprinkler irrigation equipments. Very strong and flexible structure

## TUBE

Black, smooth, **SBR** rubber compound

## REINFORCEMENT

High strength synthetic plies with steel wire spirals









## COVER

Black, smooth, cloth impression **SBR/EPDM** rubber compound, abrasion and weather resistant

## WORKING TEMPERATURE

-22°F +176°F

-30°C +80°C

|  |         |  |         |  |  |     |  |     |  |  |  |
|---|---------|---|---------|---|---|-----|---|-----|---|---|---|
| ID  |         | OD  |         | WEIGHT  | WP  |     | BP  |     | BENDING RADIUS  | VACUUM  | COIL LENGTH   |
| mm  | inch    | mm  | inch    | kg/m  | bar   | psi | bar   | psi | mm  | bar   | m   |
| 51  | 2       | 61  | 2 13/32 | 1.39  | 5   | 75  | 15  | 225 | 230   | 0.9   | 20  |
| 55  | 2 11/64 | 66  | 2 19/32 | 1.37  | 5   | 75  | 15  | 225 | 250   | 0.9   | 20  |
| 60  | 2 23/64 | 71  | 2 51/64 | 1.72  | 5   | 75  | 15  | 225 | 275   | 0.9   | 20  |
| 70  | 2 3/4   | 81  | 3 3/16  | 2.07  | 5   | 75  | 15  | 225 | 350   | 0.7   | 20  |
| 76  | 3       | 87  | 3 27/64 | 2.21  | 5   | 75  | 15  | 225 | 380   | 0.7   | 20  |
| 80  | 3 5/32  | 91  | 3 37/64 | 2.35  | 5   | 75  | 15  | 225 | 400   | 0.7   | 20  |
| 102   | 4       | 114   | 4 31/64 | 3.47  | 5   | 75  | 15  | 225 | 510   | 0.7   | 20  |

Other diameters, pressure ratings are available on request. Technical data, structures and polymers are subject to change without notice.

## BRANDING