


# ECOGAS

SUCTION HOSE EXHAUST GASSES- HELIX GROOVED, CRUSH RESISTANT

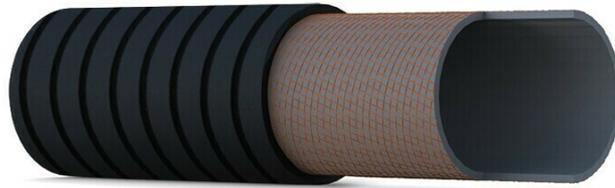

## APPLICATION

Suction hose for vehicles exhaust gasses and other warm gasses. Heavy and crush resistant structure, used on the floors of the garages, coach works, test centers, etc

## TUBE

Black, corrugated **EPDM** rubber compound

## REINFORCEMENT

High strength synthetic plies

## COVER

Black, corrugated, cloth impression **EPDM** rubber compound, heat, abrasion and weather resistant

## WORKING TEMPERATURE

-40°F +338°F

-40°C +170°C

ID		WEIGHT	BENDING RADIUS	COIL LENGTH
mm	inch	kg/m	mm	m
51	2	1.00	300	ON DEMAND
76	3	1.55	450	ON DEMAND
102	4	2.20	600	ON DEMAND
127	5	2.70	750	ON DEMAND
152	6	3.10	900	ON DEMAND

Other diameters, pressure ratings are available on request. Technical data, structures and polymers are subject to change without notice.